


Hardware Contents:

- 1) Swivel Cleat Base (Mounts to Dock or Swim Platform)
- 1) Swivel Cleat Top (Rotates and locks down doggydocks)
- 2) 5/16" Machine Thread Tap Bolts
- 2) Small Flat Washers for the counter sink holes in the base
- 2) Medium Flat Washers
- 2) 5/16" Nylon Insert Lock Nuts
- 1) ¼-20 Tap Bolt with Hex Head (See Note Below)
- 1) ¼-20 Knob
- 1) 1¼" Flat Washer

Note:

We have eliminated the lock washer previously used to tighten. Instead we have cut a hex shape countersink hole which is located on the underside of the base. The hex bolt has been pressed into the hex shaped opening for your convenience. You will need to turn the Swivel Cleat's top and base pieces to separate them in order to install the base. Make sure the Hex is flush or the base will not sit level.

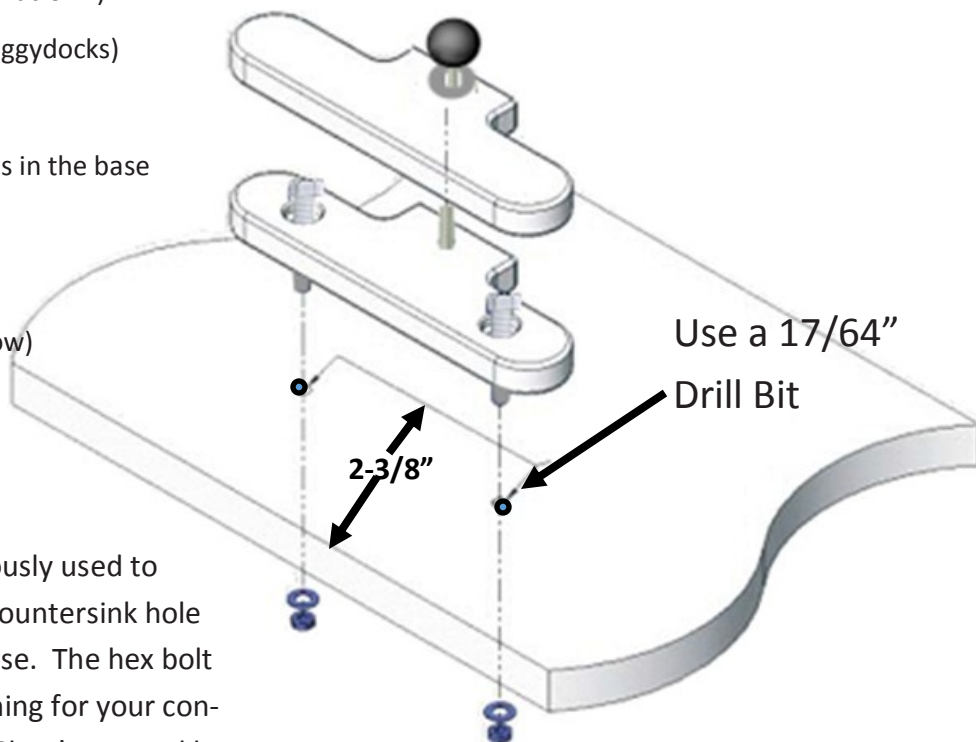

Installing The Swivel Cleat

The doggydocks hinge must be supported by the dock or swim platform as shown in setup instructions

1. Measure and mark a line 2-3/8" to the edge..
2. Place the Swivel Cleat base on the line and mark the holes to be drilled for bolts.

Securing doggydocks®

1. Place the Swivel Cleat in the closed position.
2. Set doggydocks mounting board over Swivel Cleat.
3. Loosen Knob and Rotate the top of Swivel Cleat 180 degrees.
4. Tighten knob to secure doggydocks.

The Hardware that is included with the Swivel Cleat is for underside mounting. **However if your dock is wood, you have the option of installing the Swivel Cleat from the top side, however the hardware you will need are (2) 5/16" x 3" Lag Bolts. And (2) Washers.**