


doggydocks® Models


Original doggydocks®



Folding doggydocks®

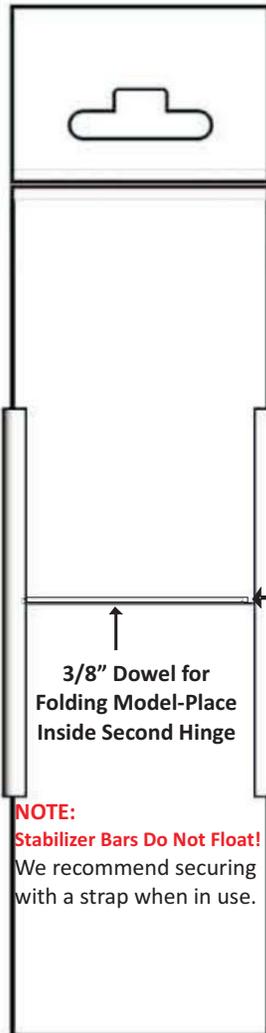

Jumbo doggydocks®

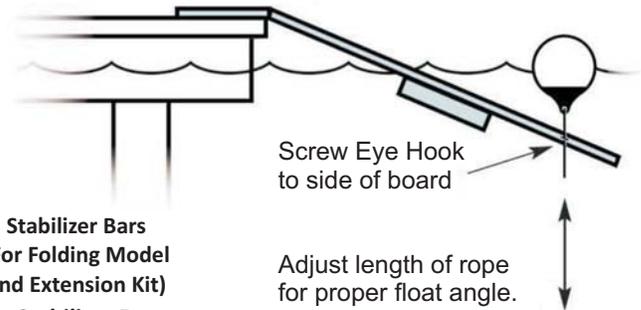


Stabilizer Bars (For Folding Model and Extension Kit)


Installing Stabilizer Bars:
Fold the doggydocks until the middle hinge is visible.
Place the 3/8" round dowel in the fold of the second hinge.

Straighten out the doggydocks and center stabilizer bars with hinge. Press firmly to make sure board is locked.


Floatation Buoys For Jumbo doggydocks®



doggydocks® Extension



Snapbag™ for All Models




Use stabilizer bars to join doggydocks® and extension piece. Install screws in pre-drilled holes.

Installation Steps

1. Install Mounting Kit on Dock, Boat or Swim Platform. (See Instructions Page 2)
2. Place Dowel and stabilizers bars on folding models.
3. Attach Extension Kit using Stabilizer Bars and Supplied Screws.
4. Install Eye Screws to Side of the doggydocks Board.
5. Place Snapbag on Underside of doggydocks.

Setting up doggydocks® for the First Time



The angle of the doggydocks® is determined by the distance from the surface of the dock to the surface of the water. The greater the distance above the surface, the greater the angle.

For optimal functionality the desired angle for the doggydocks should be at a 15° angle so that your dog does

not have to try to "climb out". The doggydocks® is designed to simulate a shoreline slope, not a steep embankment. The ability for the angle to fluctuate and still allow dogs to walk up,

If the doggydocks® becomes too steep while your dog is moving and you have tried the floatation in several positions, check the distance between the top of the mounting location and the water line. If you have a dog over 55 lbs. and the distance is greater than 24", you may need an "Extension Kit", available at www.pupgearcorporation.com.

Caution:

Never leave your dog unsupervised in or around water. doggydocks® are not intended for use by humans, live stock or wildlife. doggydocks® are not intended as a personal floatation device or a life saving device for your dog. doggydocks® should always be used under adult supervision. PupGear strongly recommends that the doggydocks® be removed from the water when not in use.

Adjusting the doggydocks® Floatation Angle:


The angle of the doggydocks® is determined by the height of the swim step, dock or pool side above the surface of the water and the positioning of the floatation SnapBag™. The ideal slope angle is 15° so that your dog does not have to try to "climb out" of the water. The doggydocks® is designed to simulate "walking out" on a gentle shoreline slope, not a steep embankment.

Dog Weight in Pounds:

- 5 -10 Position the bag closer to the mounting location
- 10-30 Position the bag in the middle
- 30-65 Position one or two snaps closer to the end
- 65-85 Position approximately 12" from the end

NOTE:

Allow for 15% additional weight when dog is wet.

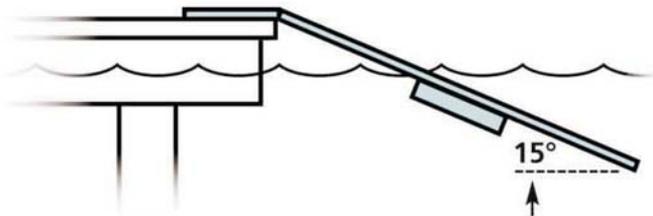


If your dog is approximately 55 lbs and the doggydocks® becomes too steep while your dog is using it, check to see if the distance between the mounting location and the water surface is not greater than 18". If so you may need a **doggydocks® Extension Kit**.

Step 1: Attaching the Snapbag™

1. Insert foam blocks into the Snapbag™
2. Attach Snapbag™

Note: The Snapbag™ is adjustable to ensure proper "floatation angle" depending on the weight of the dog and the height of the mounting platform. This will require testing due to the floatation properties that differ between salt water and fresh water and the height variance of your mounting location.

You can also adjust the "floatation" by adding or removing the foam blocks in the Snapbag™.

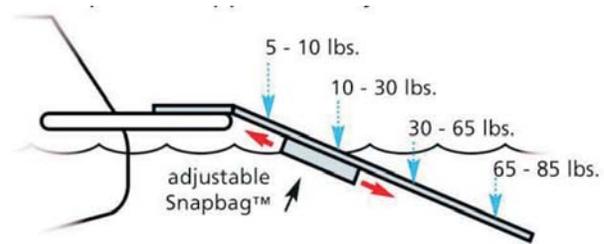


Step 2: Placing the doggydocks® in the water

Place the doggydocks® in the water by flipping it over so that the carpeted side is down and the Snapbag™ is up. Carefully slide the doggydocks® into the water.

Step 3: Checking and adjusting the floatation angle


Adjust the Snapbag™ (see instructions to the right) so that the end of the doggydocks® is approximately 6" to 10" below the surface. This is so your dog can easily access the doggydocks® by walking onto the doggydocks®, not climbing.

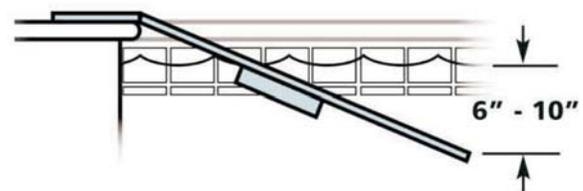

Proper Support:

Note:
The hinge must be supported during use. Misuse will void warranty.

Diagram 1.

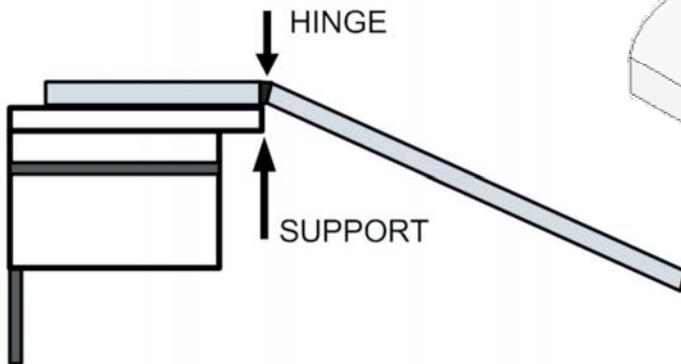


The doggydocks® hinge is designed to allow it to move up or down. It is not designed to carry weight. Place doggydocks so hinge is directly over edge of dock as illustrated.

IMPORTANT:

Before installing the mounting assembly base, make certain that the 1/4" x 2.5" bolt and lock washer is seated properly or the thumbscrew will not tighten properly.

Note:

Depending on the type of surface installing on it may be necessary to use different bolts types.

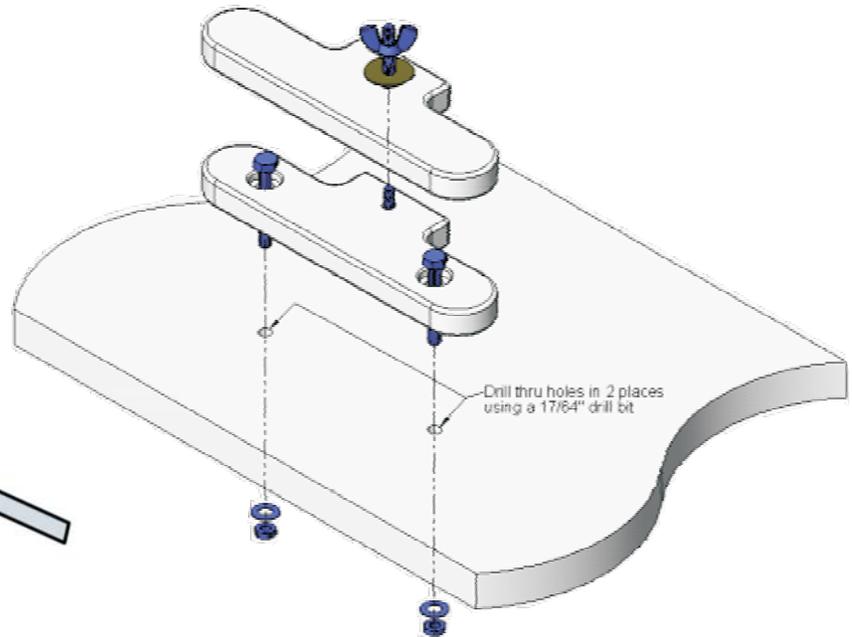

Securing doggydocks®

1. Place the swivel cleat in the closed position.
2. Set doggydocks cleat cut out over swivel cleat.
3. Loosen wing nut and swivel the top part turn 180 degrees.

Quick Release Mounting Kit Instructions

Diagram 2.


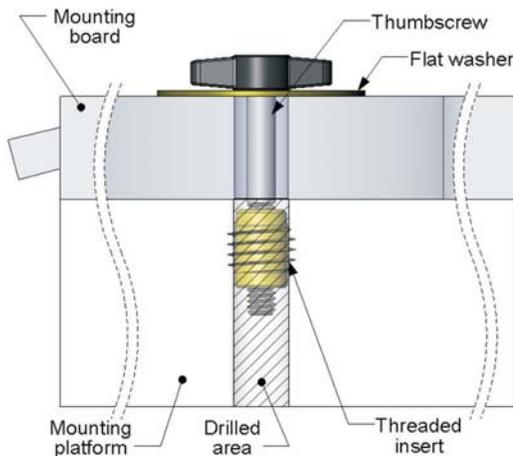




Diagram 3.

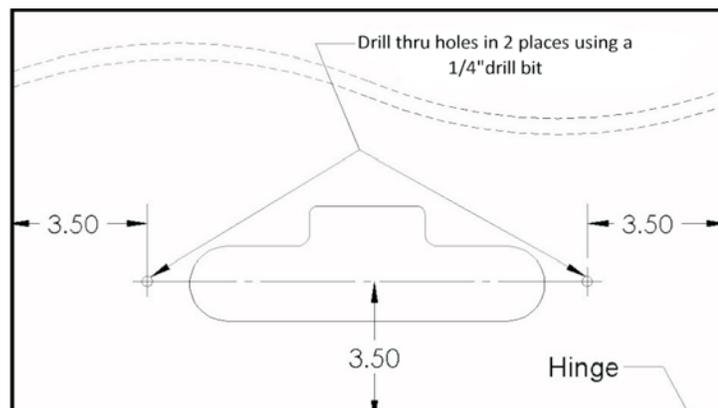

Installing Hardware

1. Line up doggydocks™ with the edge of mounting surface.
2. Drill (2) holes into the doggydocks® as shown in diagram 2
3. Mark platform through the drilled holes.
4. Drill 1/4" holes in mounting surface.
5. Screw insert flush into dock or platform.
7. Line up holes.

You may also be interested in:

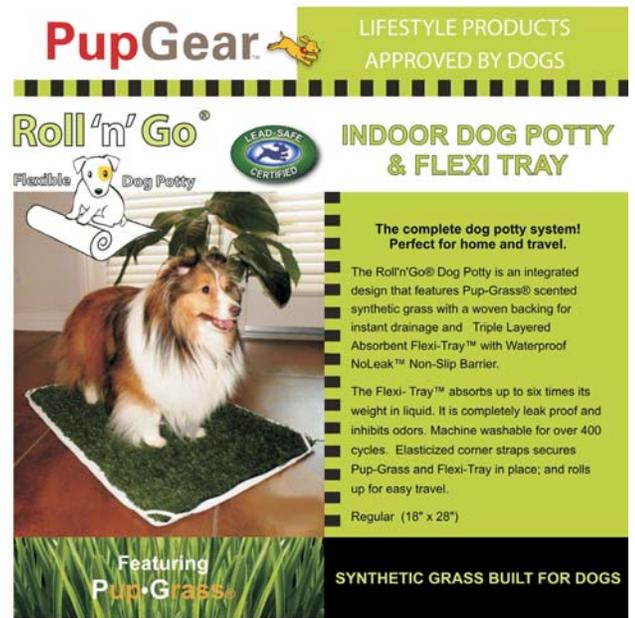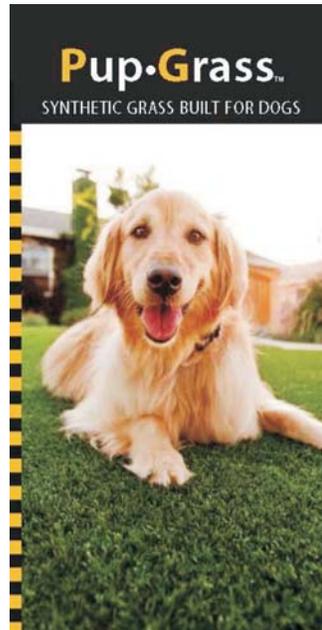

These and other great products for your dog are available at:
www.pupgearcorporation.com

PupGear Warranties and Return Policy

Warranties

PupGear Corporation guarantees their products for a period of one year against defects in material and workmanship; during the warranty period, we will send the customer replacement parts or the customer can return the product directly to us for repairs or replacement. Improper use or installing the product in a method not approved by PupGear will void the product warranty.

Product Support

PupGear is committed to customer satisfaction. If a customer is having a problem using the doggydocks and needs assistance, we offer customer support 7 days a week. Weekday our number is 702.547.3587. On weekends please text your questions to 408.373.2277 and we will respond as soon as possible. You may also email pup@pupgearcorporation.com

Return Policy

Products must be returned in unused condition, in the original carton, within 10 days of receipt of delivery. A 20% restocking fee may be applied.

Before returning merchandise, customer must request a return authorization. The option to request a return will only display if a customer signs in with the user name and password used when making a purchase on our website.

Cancellations are subject to a 10% service charge if order is cancelled after 24 hours.

Product Disclaimer

PupGear Corporation, their dealers, retailers, and distributors are not responsible for any use or misuse of products other than the stated and intended use.