




It is critical that the doggydocks® is mounted on a square surface. If you are installing in a pool and you have coping or the wall is slanted you will need to construct a platform to square the area where the mounting board will sit.

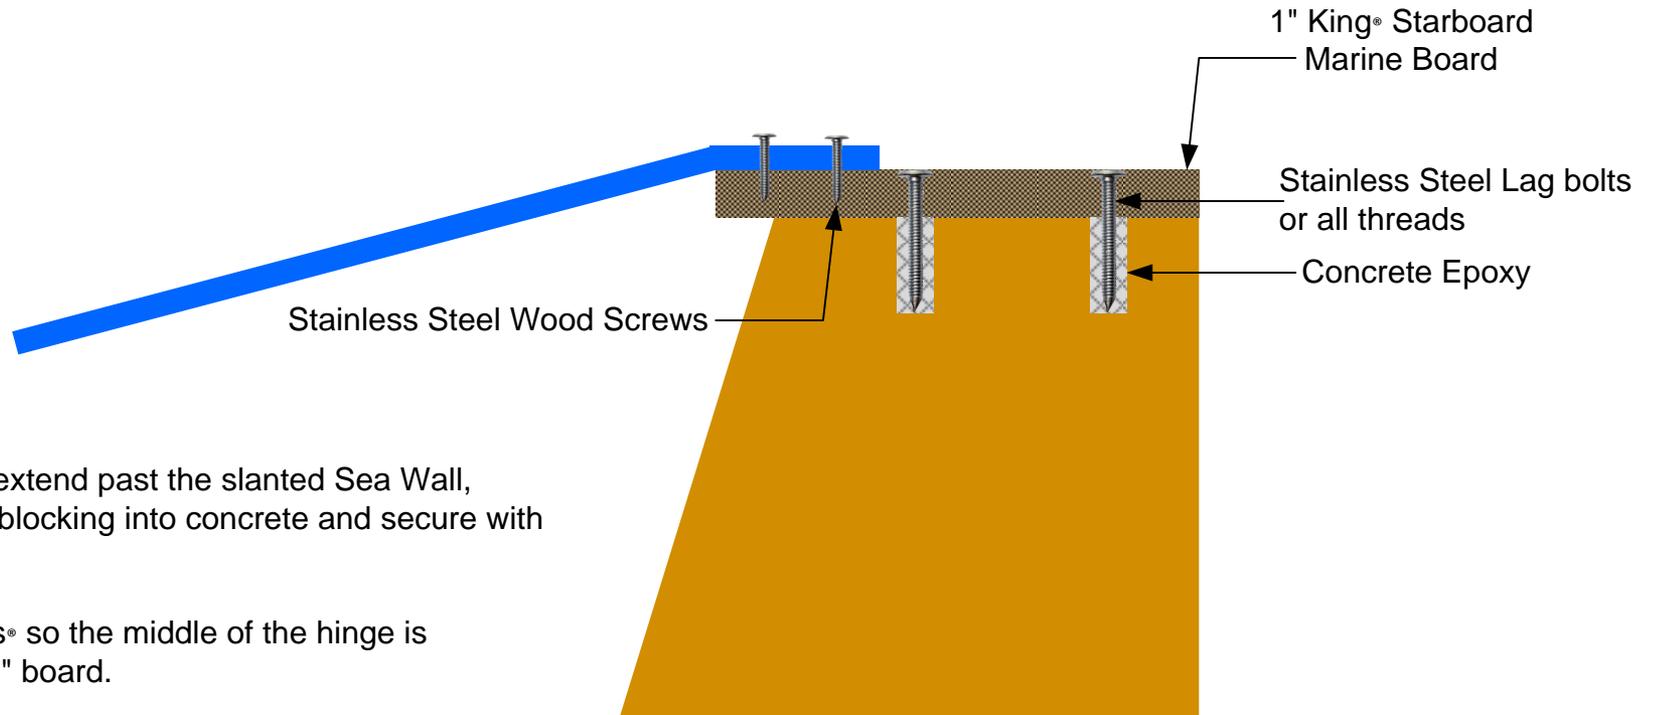

### Instructions

1. Use Solid Board, extend past the slanted Sea Wall, Drill through the solid blocking into concrete and secure with Lag Bolts and Epoxy.
2. Install doggydocks® so the middle of the hinge is supported on to the 1" board.
3. Once the marine board is secured to the sea wall, drill holes as shown in mounting instructions. You have the option of using knife threaded inserts which is a good idea If you will be removing the doggydocks® at the end of the day. Use a quality Marine Caulk around the drilled holes to prevent water intrusion.